

Creative Playthings®

MODEL# SD 204-102Q
ASSEMBLY MANUAL

LEXINGTON PICNIC TABLE

PICNIC TABLE ASSEMBLY

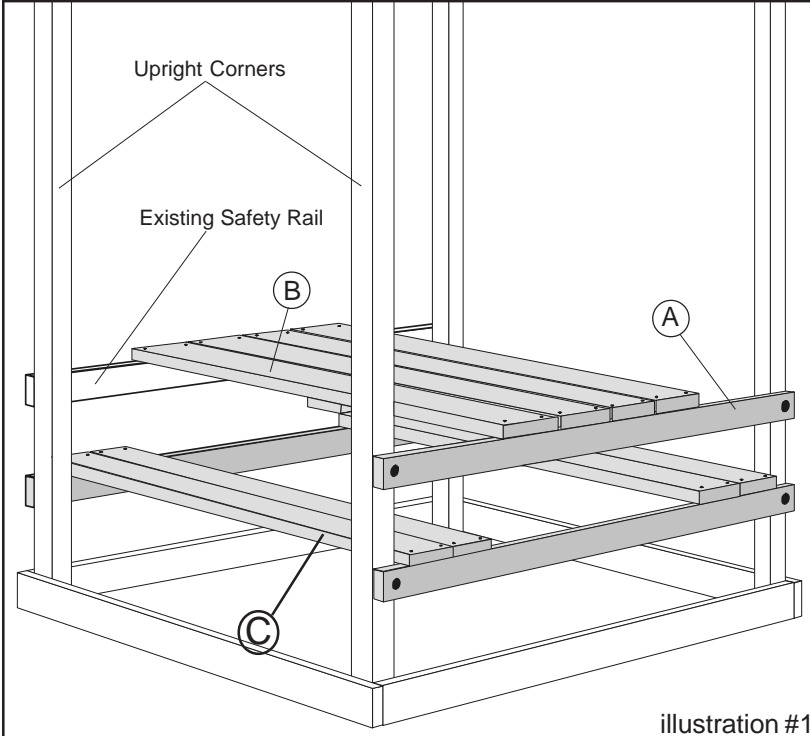


illustration #1

PART DESCRIPTIONS

A - (3) 31465-102 Picnic Table Support Rail - 2 x 4 x 83-1/4"

B - (4) 31941-102 Table Boards - 5/4 x 6 x 59-1/2"

C - (4) 32117-102 Seat Boards - 2 x 6 x 59-1/2"

D - (1) 31942-102 Table Cleat - 5/4 x 6 x 20-1/4"

(6) 17036-1002 - 5/16 x 2-1/2" Lag Screws

(24) 17020-105 - #10 x 1-1/2" Flat Head Phillips Screw

(16) 17020-109 - #8 x 2-1/2" Flat Head Phillips Screw

(6) 17002-206 - 5/16" Flat Washer

(6) 15081-904 - 1" Hole Cap

illustration #2

SPECIAL NOTES AND INSTRUCTIONS

The installation of the Picnic Table option may require some disassembly of existing components. Sandbox Seats must be removed and will not be used with the Picnic Table. The existing Safety Rail must be removed and will be utilized later in these instructions

All hardware on this set is specially coated for corrosion resistance. If non-Creative Playthings hardware is used, it **MUST** be galvanized or stainless steel.

STEP 1 - PILOT HOLES

You will have to drill two pilot holes in each of the corner uprights for the 2x4 Picnic Table Support Rails (A) and the 5/16 x 2-1/2" Lag Screws.

Locate and mark for two pilot holes in each of the Corner Uprights.

NOTE: They will be located on the same side as the Safety Rail was attached and the adjacent side. Measure up 16-3/4" from the bottom of the Corner Uprights to the first hole and 26-3/4" to the second.

At each mark, drill a 3/16" dia. hole to a depth of 1" as shown in illustration #3.

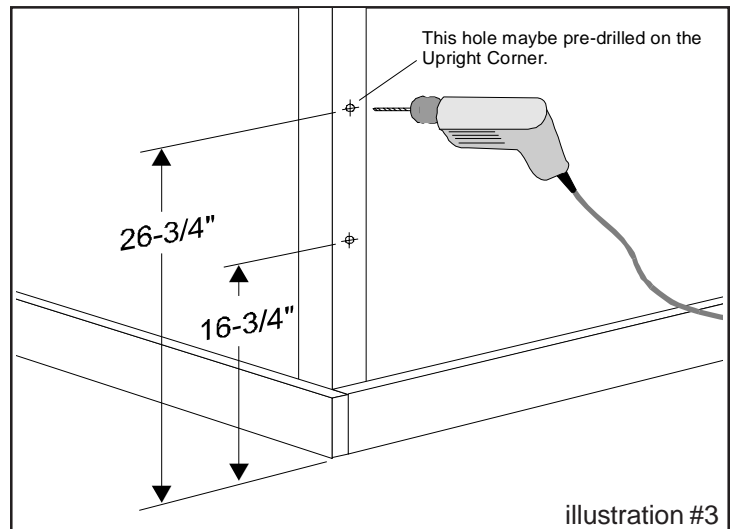


illustration #3

STEP #2 - INSTALL LOWER RAILS & SEATS

Install both of the lower Support Rails (A) to the Corner Uprights using (2) 5/16 x 2-1/2" Lag Screws and (2) 5/16" Flat Washers in each as shown in illustration #4.

NOTE: The Existing Safety Rail will be utilized as one of the Picnic Table Support Rails.

After all of the Lag Screws are installed and tightened, install the 1" dia. Holes Caps into the counterbored holes over the bolt hardware.

Arrange (2) of the Seat Boards on each side of the lower Support Rails. Attach the Seat Boards using (4) #8 x 2-1/2" Flat Head Phillips Screws in each board as shown in illustration #4.

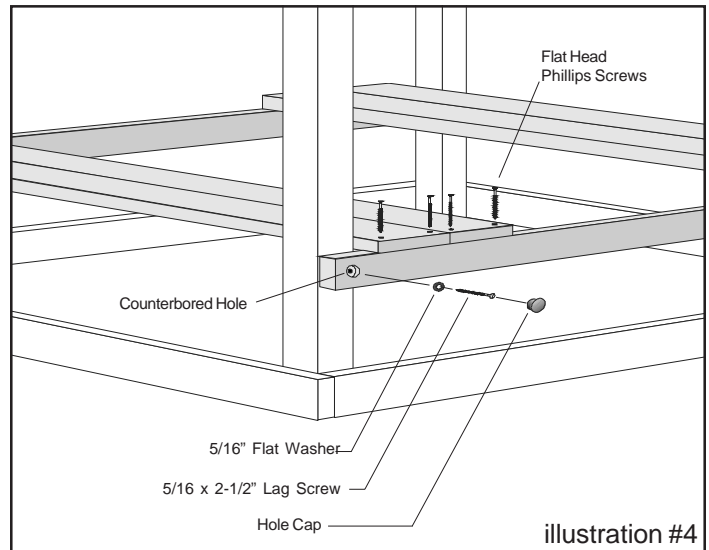


illustration #4

STEP #3 - INSTALL TABLE TOP

Install both of the upper Support Rails (A) to the Corner Uprights using (2) 5/16 x 2-1/2" Lag Screws and (2) 5/16" Flat Washers in each as shown in illustration #5.

After all of the Lag Screws are installed and tightened, install the 1" dia. Hole Caps into the counterbored holes over the bolt hardware.

Arrange (4) Table Top Boards in the center of the (2) Top Support Rails and attach each board using (4) #10 x 1-1/2" Flat Head Phillips Screws in each as shown on illustration #5.

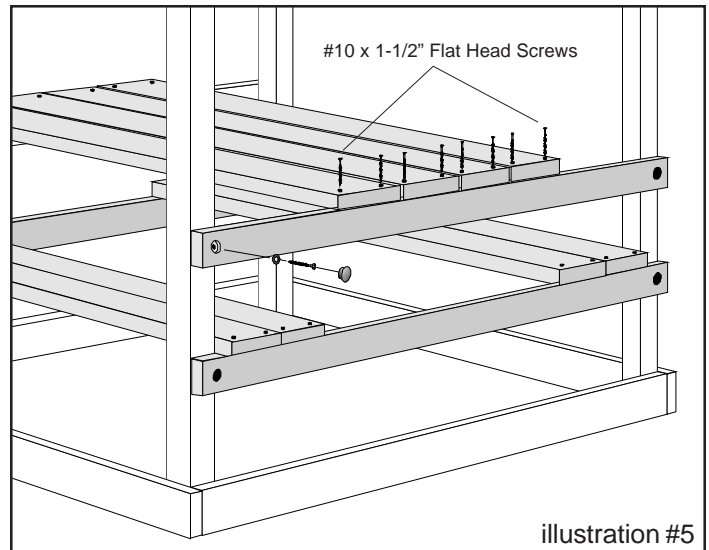


illustration #5

STEP #4 - FASTEN CLEAT

Fasten the Table Cleat (D) in the center beneath the Table Top Boards (B) using (8) #10 x 1-1/2" Flat Head Phillips Screws as shown in illustration #6.

CAUTION: To avoid any possibility of injury, make sure that all of the Flat Head Screws are in flush or slightly below the surface of the wood.

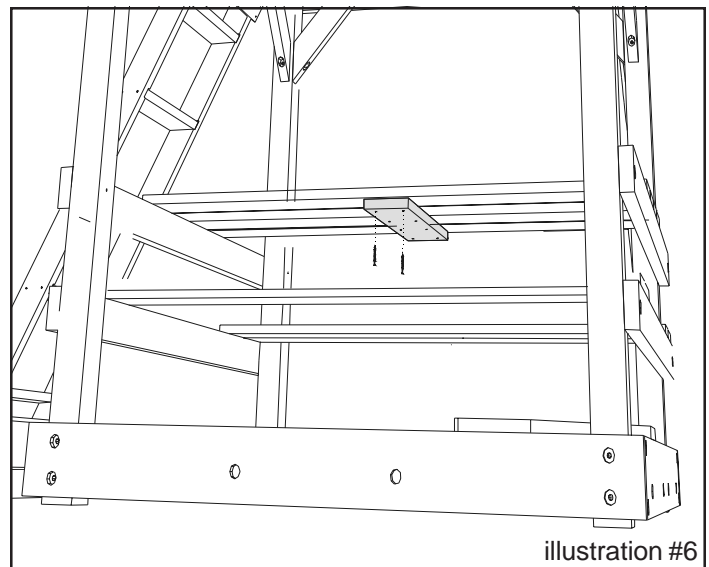


illustration #6

PLEASE CONSULT YOUR ORIGINAL GYM ASSEMBLY MANUAL FOR MAINTENANCE AND SAFETY INSTRUCTIONS